


GROUP NO.	PART NO.	PERFORMANCE LEVEL			WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	WARRANTY FREE MONTHS	FOOTNOTES		
		CCA	R.C.	REF. CA		LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
12-VOLT PREMIUM / A3™ TECHNOLOGY																
75/86	575DT	540	85	665	33	9-3/4	248	7	178	8-1/8	206	1.0	18	14,16,17,18,22,37,45		
34/78	578DT	550	90	675	35	10-3/4	273	6-7/8	175	8	203	1.0	18	14,16,17,18,22,28,45		
24	524MF	550	90	675	37	10-3/4	273	6-3/4	171	9	229	1.0	18	17,22,45		
	424MF	460	70	565	36											
24F	524FMF	550	90	675	37	10-3/4	273	6-3/4	171	9	229	1.0	18	17,22,45		
	424FMF	460	70	565	36											
25	525MF	550	90	675	34	9-3/4	248	6-7/8	175	8-7/8	225	1.0	18	17,22,45		
26	526MF	540	80	665	30	8-3/4	222	6-3/4	171	8	203	1.0	18	17,18,22,37,45		
	426MF	450	55	555	27.5											
26R	526RMF	540	80	665	30	8-3/4	222	6-3/4	171	8	203	1.0	18	17,18,22,37,45		
	426RMF	450	55	555	27.5											
34	534MF	550	90	675	35	10-3/4	273	6-7/8	175	8	203	1.0	18	17,18,22,28,45		
35	535MF	550	90	675	34	9-9/16	247	6-7/8	175	8-7/8	225	1.0	18	17,22,45		
42/58R	542/58R	500	75	615	30	10	254	7-1/4	184	6-7/8	175	1.0	18	17,22,45		
45	545MF	485	65	595	31	9-3/8	238	5-1/2	140	9	229	1.0	18	45		
48 (H6/L3)	548MF	615	95	755	38.5	11	278	6-7/8	175	7-1/2	190	1.0	18	17,22,45		
51	551MF	450	70	555	28.5	9-3/8	238	5	127	8-3/4	222	1.0	18	22,45		
51R	551RMF	450	70	555	28.5	9-3/8	238	5	127	8-3/4	222	1.0	18	22,45		
58	558MF	500	75	615	30	10	254	7-1/4	184	6-7/8	178	1.0	18	17,22,45		
65	565MF	675	130	830	41.5	12	305	7-3/8	187	7-5/8	194	1.0	18	17,22,45		
70	570MF	540	80	665	30	8-3/4	222	7	178	7-1/8	181	1.0	18	17,18,22,37,45		
75	575MF	540	85	665	33	9-3/4	248	7	178	7-1/4	184	1.0	18	17,22,45		
78	578MF	550	90	675	35	10-3/4	273	6-7/8	175	7-1/4	184	1.0	18	17,22,45		
86	586MF	540	85	665	35.5	9	229	6-7/8	175	8-1/8	206	1.0	18	22,45		
99R (T4)	599RMF	450	68	555	26.5	8-1/4	210	6-7/8	175	6-7/8	175	1.0	18	17,45		
140R (H4/LN1)	5140RMF	445	76	545	28	8-1/4	210	6-7/8	175	7-1/2	190	1.0	18	17,22,45		
151R	5151RMF	340	55	410	23.5	7-3/4	197	5-1/8	129	8-7/8	226	1.0	18	17,22,45		
46A24L (Miata)	8AMU1R	320	45	400	24	7-3/4	197	5-1/8	130	7-1/8	181	0.5	18	2,13,38,39,45		
12-VOLT VALUE LINE MAINTENANCE-FREE																
75/86	VL75DT	475	60	585	34.5	9-3/4	248	7	178	8-1/8	206	1.0	12	14,16,17,22,45		
34/78	VL78DT	525	80	645	34.5	10-3/4	273	6-7/8	175	8	203	1.0	12	14,16,17,22,45		
24	VL24	440	70	540	35	10-3/4	273	6-3/4	171	9	229	1.0	12	17,22,45		
24F	VL24F	440	70	540	35	10-3/4	273	6-3/4	171	9	229	1.0	12	17,22,45		
26	VL26	440	55	540	27.5	8-3/4	222	6-3/4	171	8	203	1.0	12	17,22,45		
26R	VL26R	440	55	540	27.5	8-3/4	222	6-3/4	171	8	203	1.0	12	17,22,45		
35	VL35	450	70	550	33.5	9-9/16	247	6-7/8	175	8-7/8	225	1.0	12	17,22,45		
58	VL58	440	70	540	29.5	10	254	7-1/4	184	7	178	1.0	12	17,22,45		
65	VL65	650	120	800	41.5	12	305	7-3/8	187	7-5/8	194	1.0	12	17,22,45		
31	VL31X	925	170	1135	55	13	330	6-3/4	171	9-1/2	241	1.5	12	17,19,22,45,X		
	VL31	650	130	800	52											
31P	VL31PX	925	170	1135	55	13	330	6-3/4	171	9-1/2	241	1.5	12	17,19,22,45		
	VL31P	650	130	800	52											
12-VOLT VINTAGE VEHICLES & LIGHT COMMERCIAL																
3EE	403E	400	95	490	42	19-1/4	489	4-1/4	108	9	229	1.0	12	11,25,45		
22NF	See page 2, Lawn Mower – Garden Tractor – Small Engine section.															
29NF	429NF	420	77	520	38.5	13	330	5-1/2	140	9	229	1.0	12	11,12,45		
6-VOLT VINTAGE VEHICLES & LIGHT COMMERCIAL																
2E	402E	620	190	765	42	19-1/4	489	4	102	8-7/8	225	1.0	12	11,15,25,45		
19L	319L	440	120	540	26	8-1/4	210	6-3/4	171	7-1/2	191	1.0	12	11,15,25,45		
8-VOLT COMMERCIAL SERVICE																
1	801	520	102	640	32	8-7/8	225	6-3/4	171	8-7/8	225	1.0	12	12,25,45		
6-VOLT HEAVY-DUTY COMMERCIAL SERVICE																
1	901MF	640	130	785	33	9	229	6-7/8	175	8-3/4	222	1.0	12	21,25		
2	902	675	185	830	37	10-3/8	264	6-7/8	175	8-3/4	222	1.0	12	12,25		
3EH	93EH	875	250	1075	47	19-1/4	489	4-1/4	108	10	254	1.0	12	12,25		
4	904MF	975	250	1200	48	12-1/2	318	6-7/8	175	9-1/2	241	1.5	12	21,25		
5D	905D	880	250	1080	50	13-3/8	340	7-1/8	181	9-1/4	235	1.5	12	12,25		
12-VOLT HEAVY-DUTY COMMERCIAL SERVICE																
3ET	93ET	500	120	615	49.5	19-1/4	489	4-1/4	108	9-7/8	251	1.0	12	12,25		
4D	904D	1050	290	1290	97	20-3/4	527	8-1/2	216	10-1/8	258	3.0	12	12,17,21,22		
4DLT	94DLT	850	240	1045	78.5	20	508	8-1/8	206	8-1/8	206	2.0	12	12,19,25		
	908DFT	1425	440	1755	127									4.0	12	12,17,21,22
	908D	1400	430	1720	130									4.0	12	12,17,25
8D	708D	1100	325	1355	114.5						4.0	12	12,17,25			
17TF	917TF	530	140	650	63	17	432	6-7/8	175	8	203	1.5	12	11,15,19,25		
28	928MF	550	100	675	42.5	10-1/4	260	6-3/4	171	9-1/2	241	1.0	12	21,22,X		
30H	930H	650	150	800	51	13	330	6-3/4	171	9-1/2	241	1.5	12	19,21,22		
31	1231MF	1000	185	1230	60	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,X		
	1131MF	950	175	1170	56.5									1.5	18	17,19,21,22,X
	1031MF	760	170	935	53.5									1.5	18	17,19,21,22,X
	931MF	650	150	800	52									1.5	18	17,19,21,22,X
31P	1231PMF	1000	185	1230	60	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22		
	1131PMF	950	175	1170	56.5									1.5	18	17,19,21,22
	1031PMF	760	170	935	53.5									1.5	18	17,19,21,22
	931PMF	650	150	800	52									1.5	18	17,19,21,22
12-VOLT HEAVY-DUTY COMMERCIAL SEVERE SERVICE/DUAL PURPOSE																
31	7T31	730	190	900	62	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X		
31P	7T31P	730	190	900	62									1.5	18	17,19,21,22,43
31	DP31CS	700	185	860	57									1.5	18	17,19,21,22,43,X
12-VOLT HEAVY-DUTY COMMERCIAL – AGM – DEEP CYCLE / STARTING																
31	8A31	800	200	1000	67.5	13	330	6-3/4	171	9-1/2	241	1.5	18	2,13,17,38,39,43,X		
12-VOLT LAWN MOWER – GARDEN TRACTOR – SMALL ENGINE CALCIUM MAINTENANCE-FREE																
U1	11U1L	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
	10U1L	300	—	370	17									0.5	6	22,Z
	8U1L	230	—	285	15.5									0.5	6	22,Z
	7U1L	195	—	240	15									0.5	6	22,Z
	4U1L	150	—	185	14.5									0.5	6	22,Z
U1R	11U1R	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
	10U1R	300	—	370	17									0.5	6	22,Y
	8U1R	230	—	285	15.5									0.5	6	22,Y
	7U1R	195	—	240	15									0.5	6	22,Y
	4U1R	150	—	185	14.5									0.5	6	22,Y
U1L = left front positive; U1R = right front positive (with terminal side of battery to front)																
22F	522FMF	425	65	525	31.5	9-3/8	238	6-3/4	171	8-1/4	210	1.0	6			
22NF	322NF	360	58	445	29	9-3/8	238	5-1/2	140	9	229	0.5	6	12		

GROUP NO.	PART NO.	CCA	REF. MCA	20 HR CAP	MINS @ 23 A	MINS @ 25 A	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	WARRANTY FREE MONTHS	FOOTNOTES		
								LENGTH		WIDTH		HEIGHT						
								in	mm	in	mm	in	mm					
12-VOLT MARINE / RV STARTING CALCIUM MAINTENANCE-FREE																		
24	24M7	800	1000	—	—	130	46	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
	24M6	650	800	—	—	115	40	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
	24M5	550	675	—	—	90	37	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
	24M4	460	565	—	—	70	36	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
27	27M6	840	1050	—	—	182	53	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	17,U		
12-VOLT MARINE / RV DUAL PURPOSE STARTING / CYCLE SERVICE																		
24	DP24	550	675	65	140	120	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U		
27	DP27	650	800	80	175	150	51	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U		
31	DP31DT	700	860	100	205	185	57	13	330	6-3/4	171	9-1/2	241	1.5	12	17,21,22,44,A		
12-VOLT MARINE / RV DEEP CYCLE SERVICE																		
24	DC24	500	615	75	150	130	45.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	11,17,35,44,U		
27	DC27	575	705	90	200	175	53.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	11,17,35,44,U		
31	DC31DT	650	800	105	225	190	60	13	330	6-3/4	171	9-1/2	241	1.5	12	11,17,21,22,35,44,A		
Note: "DC" (deep cycle) part numbers include double insulated glass mat separators.																		
GROUP NO.	PART NO.	REF. CCA	REF. MCA	8 HR CAP	6 HR CAP	WEIGHT (lb)	LENGTH			WIDTH			HEIGHT			Core Value	WARRANTY FREE MO.	FOOTNOTES
							in	mm	in	mm	in	mm						
							in	mm	in	mm	in	mm						
8-VOLT MARINE AND INDUSTRIAL																		
981	8V195	980	1205	170	166	90	20-3/4	527	7-1/4	184	10-5/8	270	2.0	6	11,15,17,25			
983	819	510	625	167	158	119	24-1/2	622	7-1/2	191	10-1/2	267	3.0	6	11,17,20,25,35,T			
984	821	530	650	187	177	135	27-1/2	699	7-1/2	191	10-1/2	267	3.0	6	11,17,20,25,35,T			
985	825	730	900	224	212	160	26-7/8	683	8-1/2	216	11-3/4	298	4.0	6	11,17,20,25,35,F			
GROUP NO.	PART NO.	CCA	R.C.	20 HR CAP	WEIGHT (lb)	LENGTH			WIDTH			HEIGHT			Core Value	WARRANTY FREE MO.	FOOTNOTES	
						in	mm	in	mm	in	mm							
						in	mm	in	mm	in	mm							
ORDNANCE																		
2HN	See page 4, Dry Charged Ordnance																	
4HN	See page 4, Dry Charged Ordnance																	
6TL	6TMF	750	230	120	73	11-1/4	286	10-1/2	267	9	229	2.0	6	6,17,21,25				
GROUP NO.	PART NO.	20 HR CAP	6 HR CAP	MINS @ 75 A	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MO.	FOOTNOTES				
						in	mm	in	mm	in	mm							
						in	mm	in	mm	in	mm							
6-VOLT FLOOR SCRUBBER AND SWEEPER																		
901	9C11	250	210	130	73	11-3/4	298	7	178	11-1/2	292	1.5	6	4,11,17,19,25,34,V				
	8C11	235	190	120	67.5	11-3/4	298	7	178	14-3/8	365	2.0	6	4,11,17,19,25,34,V				
902	9C6V	330	270	170	97.5	11-3/4	298	7	178	16-1/2	419	2.5	6	4,11,17,19,25,34,W				
903	8L16	370	295	190	111	11-3/4	298	7	178	16-1/2	419	2.5	6	4,11,17,19,25,34,W				
12-VOLT FLOOR SCRUBBER AND SWEEPER																		
921	9C12	228	180	115	127	15-1/2	394	7	178	14-1/4	362	3.0	6	11,17,25,34,V				
	8C12	195	160	90	116	15-1/2	394	7	178	14-1/4	362	3.0	6	11,17,25,34,V				
GROUP NO.	PART NO.	20 HR CAP	5 HR CAP	MINS. DISCHARGED @		WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MO.	FOOTNOTES			
				75 A	56 A		in	mm	in	mm	in	mm						
				in	mm		in	mm	in	mm	in	mm						
GOLF CAR — EV — MOTIVE POWER — DEEP CYCLE SERVICE																		
GC2	GC25	235	188	132	—	488	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,11,36,U		
	GC15	230	174	120	—	448	64							1.5	12	4,11,36,U		
	GC10	215	157	105	—	395	60.5							1.5	12	11,36,U		
GC2H	GC45	255	203	145	—	530	77	10-1/4	260	7-1/8	181	11-7/8	302	1.5	12	4,11,36,U		
GC8	GC8V	165	130	85	121	318	68	10-1/4	260	7-1/8	181	11-1/8	283	1.5	12	4,11,36,U		
GC12	GC12T	150	120	70	102	280	85	13	329	7-1/8	181	11	280	1.5	12	11,N		
GROUP NO.	PART NO.	CCA	R.C.	REF. CA	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MO.	FOOTNOTES				
						in	mm	in	mm	in	mm							
						in	mm	in	mm	in	mm							
12-VOLT GOLF CAR STARTING																		
For gas engine golf cars with T881 terminal:																		
26	426G	450	55	555	27.5	8-3/4	222	6-3/4	171	8	203	1.0	12	17,22,G				
GROUP NO.	PART NO.	CCA	REF. MCA	R.C.	MINS @ 25 A	20 HR CAP	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MO.	FOOTNOTES		
								in	mm	in	mm	in	mm					
								in	mm	in	mm	in	mm					
AGM VALVE REGULATED																		
U1	8AU1	200	240	45	54	32	23	7-3/4	197	5-1/8	130	7-1/4	184	0.5	12	2,38,39,44,Y		
	8AU1H	200	240	45	54	32	23	8-5/16	211	5-1/8	130	7-1/4	184	0.5	12	2,17,38,39,44,Y		
22NF	8A22NF	350	420	85	95	55	37	9	228	5-1/2	140	9-1/4	235	0.5	12	2,38,39,44,G		
24M	8A24M	525	800	135	145	79	52	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,U		
	8A24	525	800	135	145	79	52	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,G		
24	8A24NH	525	800	135	145	79	52	10-1/4	260	6-3/4	171	9-3/8	238	1.0	12	2,38,39,44,G		
	8A27M	580	900	175	185	92	61.5	12-3/4	324	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,U		
27	8A27	580	900	175	185	92	61.5	12-3/4	324	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,G		
31M	8A31DTM	800	1000	200	210	105	67.5	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12	2,16,17,38,39,44,A		
4D	8A4D	1110	1420	380	413	198	133.5	20-3/4	527	8-1/2	216	10	254	3.0	12	2,17,44		
8D	8A8D	1450	1800	480	517	245	163	20-3/4	527	11	279	10	254	4.0	12	2,17,44		
GC2	8AGC2	680	900	380	409	190	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	2,44,U		
GEL VALVE REGULATED																		
U1	8GU1	200	290	44	47	31.6	23.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	12	4,38,39,44,Y		
	8GU1H	200	290	44	47	31.6	23.5	8-5/16	211	5-1/8	130	7-1/4	184	0.5	12	4,17,38,39,44,Y		
22NF	8G22NF	210	300	77	82	51	37.5	9	228	5-1/2	140	9-1/4	235	0.5	12	4,38,39,44,G		
24M	8G24M	410	575	132	140	73.6	51.5	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	4,17,38,39,44,U		
	8G24	335	470	132	140	73.6	51.5	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	4,17,38,39,44,G		
24	8G24NH	335	470	132	140	73.6	51.5	10-1/4	260	6-3/4	171	9-3/8	238	1.0	12	4,38,39,44,G		
	8G24SS	335	470	132	140	73.6	51.5	10-1/4	260	6-3/4	171	8-1/4	210	1.0	12	4,38,39,44,C		
27M	8G27M	505	700	160	170	88	62	12-3/4	324	6-3/4	171	9-3/8	238	1.0	12	4,17,38,39,44,U		
27	8G27	400	550	160	170	88	62	12-3/4	324	6-3/4	171	9-3/8	238	1.0	12	4,17,38,39,44,G		
	8G27/T876	400	550	160	170	88	62	12-3/4	324	6-3/4	171	9-1/4	235	1.0	12	4,17,38,39,44,B		
30H	8G30H	450	640	180	190	97.6	68.5	12-15/16	329	6-3/4	171	9-3/4	248	1.5	12	4,17,38,39,44,B		
31M	8G31DTM	550	780	180	190	97.6	68.5	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12	4,16,17,38,39,44,A		
31	8G31	450	640	180	190	97.6	68.5	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12	4,17,38,39,44,X		
34R	8G34R	300	420	90	96	60	38.5	10-3/16	259	6-5/8	168	7	178	1.0	12	4,38,39,44,C		
—	8G40C	225	325	59	63	40	31.5	7-3/4	197	6-5/8	168	6-7/8	175	0.5	12	4,38,39,44,C		
4D	8G4D	970	1245	375	395	183	127.5	20-3/4	527	8-1/2	216	10	254	3.0	12	4,17,38,39,44		
8D	8G8D	1150	1470	475	500	225	157	20-3/4	527	11	279	10	254	4.0	12	4,17,38,39,44		
GC2	8GGC2	585	850	345	375	180	69	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,38,39,44,U		
GC8	8G8VGC	400	575	250	270	140	70	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,44,U		
5SHP	8G5SHP	450	640	200	218	115	84.5	13-5/8	345	6-3/4	172	11	280	1.5	12	4,17,44		
	8G5SHP876	450	640	200	218	115	84.5	13-5/8	345	6-3/4	172	11-7/16	290	1.5	12	4,17,44,B		

GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT		MAXIMUM OVERALL DIMENSIONS					Core Value	WARRANTY FREE MONTHS	FOOTNOTES	
		CCA	10 HR CAPACITY			lb	kg	LENGTH		WIDTH		HEIGHT				
			in	mm	in			mm	in	mm						
POWER SPORTS AGM VALVE REGULATED																
	ETX9	120	8			7.5	3.4	5-7/8	150	3-7/16	88	4-3/16	106	0.2	12	2,38,39
	ETX12	180	10			10	4.5	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	2,38,39
	ETX14	220	12			11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2,38,39,42,75
	ETX14L	220	12			11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2,38,39
	ETX15	220	13			11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2,38,39,42,76
	ETX15L	220	13			11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2,38,39
	ETX16	325	19			17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	2,38,39,42,74
	ETX16L	325	19			17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	2,38,39,42,74
	ETX18L	340	20			18	8.2	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	2,38,39
	ETX20L	310	17.5			15	6.8	6-7/8	175	3-7/16	88	6-1/8	155	0.2	12	2,38,39
	ETX30L	400	26			21.5	9.8	6-5/8	168	5-3/16	131	6-7/8	175	0.2	12	2,38,39
	ETX30LA	400	26			21.5	9.8	6-5/8	168	5-3/16	131	7-3/4	197	0.2	12	2,38,39,78
GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MONTHS	FOOTNOTES
		CCA	R.C.	REF. CA	VOLTS	DRY	LENGTH		WIDTH		HEIGHT					
							in	mm	in	mm	in	mm				
DRY CHARGED																
	24	624MFD	650	115	800	12	26	10-3/4	273	6-3/4	171	9	229	1.0	24	23,45
	8D	908DY	1400	430	1720	12	80	20-3/4	527	11	279	10	254	4.0	12	12,17,23,25
	31	1231MFD	1000	185	1230	12	43	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,23,X
	U1	8U1LD	230	—	285	12	10.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	8,22,23,Z
	U1R	8U1RD	230	—	285	12	10.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	8,22,23,Y
GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	WARRANTY FREE MONTHS	FOOTNOTES
		CCA	R.C.	20 HR CAP	VOLTS	DRY	LENGTH		WIDTH		HEIGHT					
							in	mm	in	mm	in	mm				
DRY CHARGED ORDNANCE																
	2HN	2HND	400	75	45	12	25	10-1/4	260	5-1/4	133	9	229	1.0	6	12,21,25,32
	4HN	4HND	235	28	21	24	27.5	10-1/4	260	5-1/4	133	9	229	1.0	6	11,17,25,32
	6TL	6TMFD	750	230	120	12	52	11-1/4	286	10-1/2	267	9	229	2.0	6	6,17,21,25

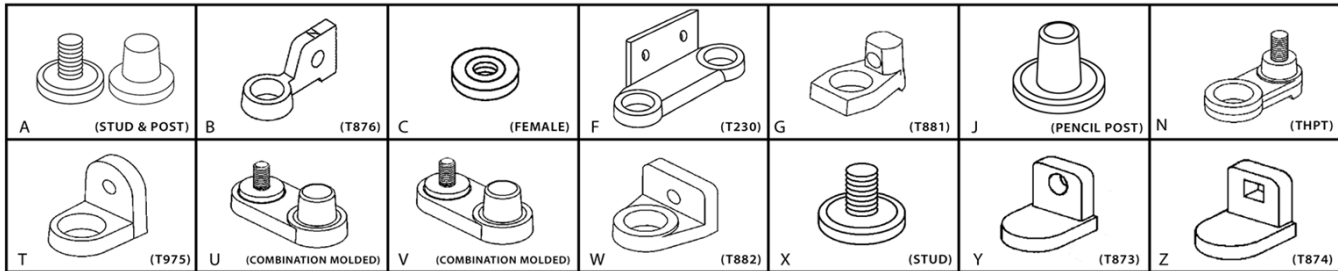

- A. Flush combination terminal w/ 5/16" stud and SAE Post, hex nuts included
- B. Flag terminal w/ 3/8" diameter hole (T876)
- C. 1/4" - 20 Copper Insert Terminal
- F. Double Wide L Terminal w/ two 3/8" holes (T230)
- G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
- J. JIS Terminal "pencil post"
- N. Vertical stainless steel 5/16"- 18 stud (THPT)
- T. Heavy Duty L terminal w/ 3/8" diameter hole (T975)
- U. Moulded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs & hex nuts
- V. Moulded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs
- W. "L" type terminal w/ 5/16" diameter hole (T882)
- X. 3/8" - 16 stainless steel stud posts
- Y. Small L terminal with round hole
- Z. Small L terminal with square hole

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in polypropylene cases & covers, except where noted
- Batteries manufactured in black cases & covers, except where noted
- SAE & DIN automotive posts used, unless noted (Excludes Power Sports)
- Warranty is suggested months
- Weights are approximates
- CA and MCA ratings @ 32°F are approximates for comparison only
- Ratings except CCA and RC, are "nominal"
- CCA and RC ratings conform to B.C.I. specifications
- CCA on 8 Volt Marine & Industrial types is for reference only

FOOTNOTES

- 2. Black cover / Gray case
- 4. Gray cover / Gray case
- 6. Black cover / Brown case
- 8. Black cover / White case
- 11. Low maintenance-low antimony grids
- 12. Hybrid construction
- 13. Absorbed Glass Mat technology (AGM)
- 14. Centerline terminal posts
- 15. Hard rubber, one-piece cover construction
- 16. Dual terminal, universal design
- 17. Includes handle
- 18. Includes top adapter
- 19. Includes lifting ledges
- 20. Hard rubber, multi-cell cover construction
- 21. Anchor locked elements
- 22. Flush manifold vented cover
- 23. Up to 10% reduced capacity
- 24. CCA is EN rating
- 25. With individual vent caps
- 26. Venting Elbow Supplied
- 28. For height with adaptor add 5/8" (16mm)
- 32. Available dry charged only
- 33. Fahrenheit Thermal Shielding Technology
- 34. Ratings after 15 cycles
- 35. Deduct 15% from CCA and CA to allow for double insulation (glass mat)
- 36. Peak performance capacity
- 37. For height with adapter add 7/8" (22mm)
- 38. "Non-spillable" as defined by DOT (Department of Transportation) definitions
- 39. "Non-spillable" as defined by ICAO (International Civil Aviation Organization) and IATA (International Air Transport Association) definitions
- 42. Height without adapter
- 43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
- 44. Free replacement warranty is 3 months in full electric vehicle use
- 45. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 6 months and 3 months in full electric vehicle use
- 46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months, free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
- 74. Shipped with 20mm height adapter
- 75. Shipped with two 17mm height adapters
- 76. Shipped with 10mm height adapter
- 78. Shipped with 22mm height adapter

PROPOSITION 65 WARNING: Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer.

WASH HANDS AFTER HANDLING.